

PowerLite[®] 1925W

Multimedia Projector




Captivating quality and color at a compelling price.

- **Incredible image quality, even in well-lit rooms** — 4000 lumens color light output, 4000 lumens white light output*
- **Larger-than-life images** — native WXGA (1280 x 800) resolution (16:10); ideal for widescreen computers
- **Brilliant detail** — 720p resolution and up to 2000:1 contrast ratio
- **Rich, vibrant color and reliable performance** — 3LCD, 3-chip optical engine
- **Built-in wireless module** — present wirelessly, with audio, using 802.11 a/b/g via a PC or Mac[®]; optional Wi-Fi[®] Quick Connect key available for faster wireless setup (PC only)
- **Convenient network accessibility** — display images over the IP network from any networked location
- **Plug 'n Play, no-hassle setup** — instantly projects images from a PC via the 3-in-1 USB connection
- **Powerful sound and communication features, no added cost** — built-in 10 W speaker, built-in closed captioning decoder
- **Cutting-edge connectivity** — RJ-45 LAN connection, HDMI port with HDCP for digital connectivity
- **Easy picture adjustments and greater positioning flexibility** — 1.6x manual zoom with powered focus, controllable via the remote or RS-232
- **Energy-efficient E-TORL[®] lamp** — lasts up to 3500 hours**
- **Message broadcasting** — broadcasts customized images/alerts over the network for announcements or instructions***
- **Quick, convenient control** — Screen Fit, Instant Off[®]/On, Direct Power Off, Lens Shutter, A/V Mute and Sleep Mode
- **Easy Management[®]** — Epson EasyMP[®] monitor and control software included
- **Epson's leading-edge EasyMP network technology** — included software allows for a wireless or wired LAN, PC-free presentations, and more
- **Added security in any environment** — convenient metal anchor bar, control panel lockout
- **Industry-leading wireless security measures** — WPA2, PEAP and LEAP
- **Easy maintenance** — easy, side-loading lamp and one-touch filter replacement
- **Outstanding support** — two-year limited warranty
- **Carrying case included** — for easy portability and protection when stored

PowerLite® 1925W

Multimedia Projector

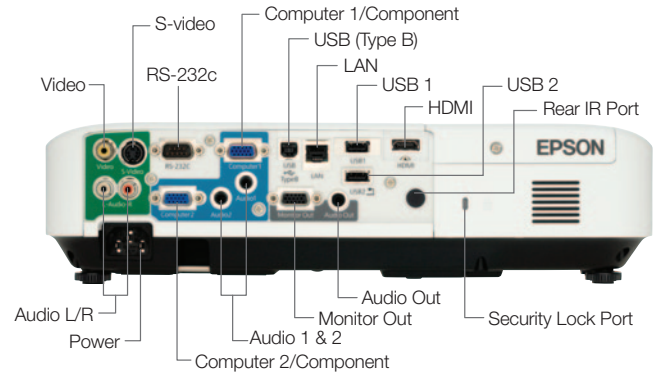

ORDERING INFORMATION

Product Name	Product Code	UPC
PowerLite 1925W	V11H314020	0 1034387476 3
Replacement lamp	V13H010L53	0 1034387483 1
Replacement air filter	V13H134A24	0 10343 87484 8

SPECIFICATIONS

Projection System

Epson 3LCD, 3-chip optical engine

Projection Method

Front/rear/ceiling mount

Driving Method

Epson Poly-silicon TFT Active Matrix

Pixel Number

1,024,000 dots (1280 x 800) x 3

White Light Output*

4000 lumens (ISO 21118 Standard)

Color Light Output*

4000 lumens

Aspect Ratio

16:10

Native Resolution

1280 x 800 (WXGA)

Resize

640 x 480 (VGA), 800 x 600 (SVGA),
1024 x 768 (XGA), 1152 x 864 (SXGA),
1440 x 900 (WSXGA), 1680 x 1050 (WSXGA+),
1400 x 1050 (SXGA+), 1600 x 1200 (UXGA)

Lamp Type

E-TORL 230 W UHE

Lamp Life**

Up to 3500 hours (ECO Mode)

Up to 2500 hours (Normal Mode)

Throw Ratio Range

1.62 – 2.61

Size (projected distance)

30" – 300" 16:10 (3' – 50.6')

Keystone Correction Automatic

Vertical: ± 30 degrees, (± 45 manual)

Horizontal ± 20 degrees, (± 30 manual)

Plug 'n Play

USB Mac® compatible via DVI to VGA
adapter (not included)

Contrast Ratio

Up to 2000:1

Color Reproduction

16.77 million colors

PROJECTION LENS

Type

Powered focus
Manual (optical) zoom

F-number

1.75 – 2.42

Focal Length

24 mm – 38.2 mm

Zoom Ratio

Optical zoom 1.0 – 1.6

OTHER

Display Performance

NTSC: 560 lines

PAL: 560 lines

(Depends on observation of the multi-burst
pattern)

Input Signal

NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/
SECAM

Interfaces

Computer/component video: D-sub 15 pin x 2

S-video: Mini DIN x 1

Composite video: RCA x 1

Audio in x 3 (RCA (L&R) x 1, mini stereo x 2)

Variable Audio Out: mini stereo x 1

USB connector: Type B x 1 (USB display and
mouse/keyboard control), Type A x 2 (for USB
memory device/Epson doc camera)

Serial: RS-232c x 1

LAN Networking: RJ-45 x 1

Monitor Out: Mini D-sub 15 pin x1

Wireless LAN port: 802.11 a/b/g

Speaker

10 W (mono)

Operating Temperature

41° to 95° F (5° to 35° C)

Power Supply Voltage

100 – 240 V ±10%, 50/60 Hz

Power Consumption

341 W

Communication on: 5.5 W standby

Communication off: .2 W standby

Fan Noise

29 dB (ECO Mode)

37 dB (Normal Mode)

Security

Kensington®-style lock provision, security
anchor bar

DIMENSIONS (W x D x H)

Including feet: 14.1" x 10.12" x 3.4"

Excluding feet: 14.1" x 10.12" x 3.74"

Weight: 7.82 lb/3.5 kg

REMOTE CONTROL

Features

Search, comp, video, USB, LAN, power,
aspect, color mode, volume, e-zoom, A/V mute,
freeze, menu, page up and down, help, auto,
mouse functions, user, ID num, pointer,
esc, enter

Operating Angle

Right/left: ± 30 degrees

Upper/lower: ± 30 degrees

Operating Distance

26' (8 m)

SUPPORT — THE EPSON CONNECTIONSM

Pre-sales Support

U.S. and Canada 800-463-7766

Internet website www.epson.com

Service Programs

Two-year projector limited warranty, Epson
Road Service program, Epson PrivateLine®
dedicated toll-free support and 90-day lamp
limited warranty

What's In The Box

Power cord, computer cable (VGA), USB
cable, wireless LAN unit, soft carrying case,
projector remote control, batteries, user manual
CD, projector software CD, Quick Setup Sheet,
PrivateLine support card, and password
protection sticker

ACCESSORY PART NUMBERS

Replacement Wireless LAN module	
V12H306P11	(ELPAP03)
Quick Wireless Connection USB Key	
V12H005M06	(ELPAP06)
Universal projector ceiling mount	ELPMBPJF
Advanced projector ceiling mount	ELPMBPRG
High-security projector ceiling mount	ELPMBATA
Adjustable suspended ceiling channel kit	ELPMBP01
False ceiling plate kit	ELPMBP02
Structural round ceiling plate	ELPMBP03
Adjustable extension column (pipe) 8" – 11"	ELPMBBC01
Component to VGA video cable	ELPKC19
S-video cable	ELPSV01
SwissGear® backpack	ELPKS63
50" portable screen	ELPSC06
60" portable pop-up screen	ELPSC07
80" portable pop-up screen	ELPSC08
Duet™ screen	ELPSC80
Epson DC-10s document camera	ELPDC10S
Epson DC-06 document camera	V12H321001
(ELPDC06)	
Kensington security lock	ELPSL01
Distribution amplifier	ELPDA01
Spare lamp	ELPLP53
Air filter	ELPAF24

* Light output varies depending on modes (color and white light output). White light output measured using ISO 21118 standard.

** Lamp life will vary depending on mode selected, environmental conditions and usage. Lamp brightness decreases over time.

*** Plug in available at www.epson.com

Better Products for a Better Future™

eco.epson.com

Epson America, Inc.

3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.

3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

www.epson.com

www.epson.ca